



Isotop Transformer Pad TR



High-performance pads for transformers with wheels

- Natural frequencies from 8.5 Hz
- Syldyn[®] inside
- Load capacities for transformers weighing up to 10 t
- Available with reel width of 40-70 mm and reel diameter of up to 200 mm

		Reel diameter	Max. load per set		Natural frequency at maximum load	Packaging unit	Order number
			in kg	in N			
Transformer Pad TR	TR-400/150-100	up to 100 mm	400	3,925	11.3 Hz	1 set (= 4 pcs.)	43099
	TR-1000/150-100	up to 100 mm	1,000	9,810	9.5 Hz	1 set (= 4 pcs.)	43100
	TR-2500/150-100	up to 100 mm	2,500	24,525	9.9 Hz	1 set (= 4 pcs.)	43101
	TR-5000/150-100	up to 100 mm	5,000	49,050	9.7 Hz	1 set (= 4 pcs.)	43102
	TR-10000/150-100	up to 100 mm	10,000	98,100	8.5 Hz	1 set (= 4 pcs.)	43103
	TR-400/150-150	101 - 150 mm	400	3,925	11.3 Hz	1 set (= 4 pcs.)	43202
	TR-1000/150-150	101 - 150 mm	1,000	9,810	9.5 Hz	1 set (= 4 pcs.)	43204
	TR-2500/150-150	101 - 150 mm	2,500	24,525	9.9 Hz	1 set (= 4 pcs.)	43206
	TR-5000/150-150	101 - 150 mm	5,000	49,050	9.7 Hz	1 set (= 4 pcs.)	43208
	TR-10000/150-150	101 - 150 mm	10,000	98,100	8.5 Hz	1 set (= 4 pcs.)	43210
	TR-400/150-200	151 - 200 mm	400	3,925	11.3 Hz	1 set (= 4 pcs.)	43203
	TR-1000/150-200	151 - 200 mm	1,000	9,810	9.5 Hz	1 set (= 4 pcs.)	43205
	TR-2500/150-200	151 - 200 mm	2,500	24,525	9.9 Hz	1 set (= 4 pcs.)	43207
	TR-5000/150-200	151 - 200 mm	5,000	49,050	9.7 Hz	1 set (= 4 pcs.)	43209
	TR-10000/150-200	151 - 200 mm	10,000	98,100	8.5 Hz	1 set (= 4 pcs.)	43211

Not held in stock. Delivery time on request (approx. 15 working days from the factory)

Isotop Transformer Pad TR (unloaded)

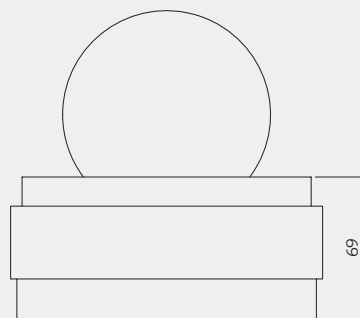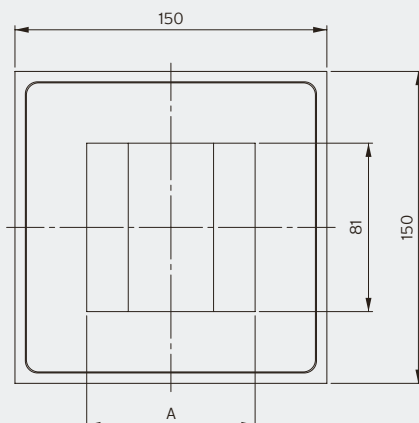


Dimension inlay [A]:
 TR-xxx-100 A = 81 mm
 TR-xxx-150 A = 105 mm
 TR-xxx-200 A = 119 mm




Vibration decoupled bearing of a distribution transformer


TR-400

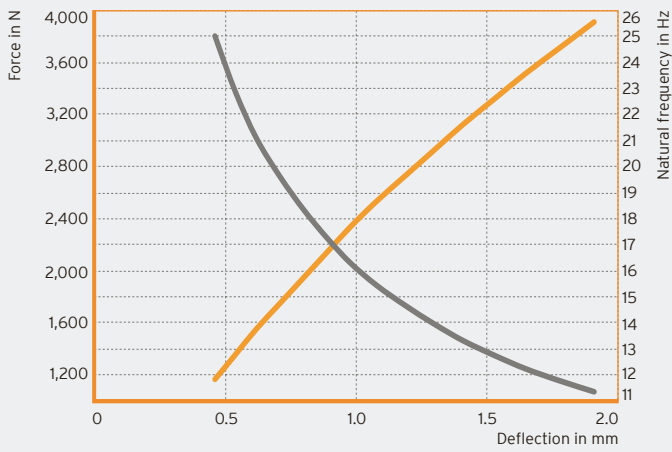


TR-1000

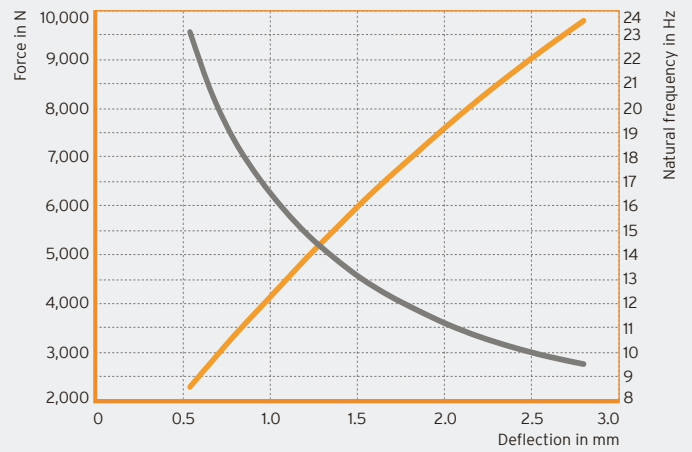


TR-2500

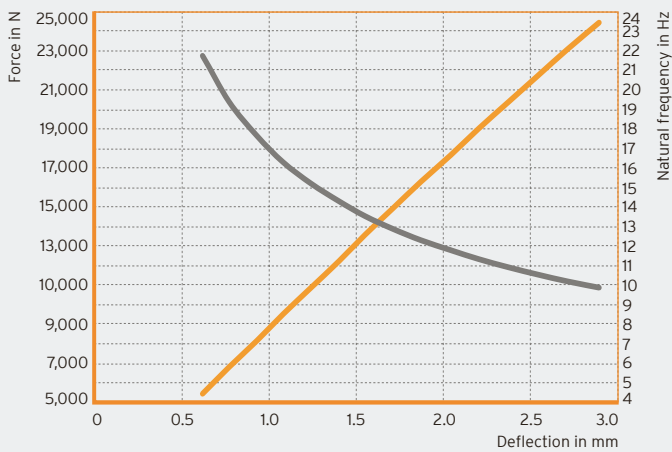

TR-5000

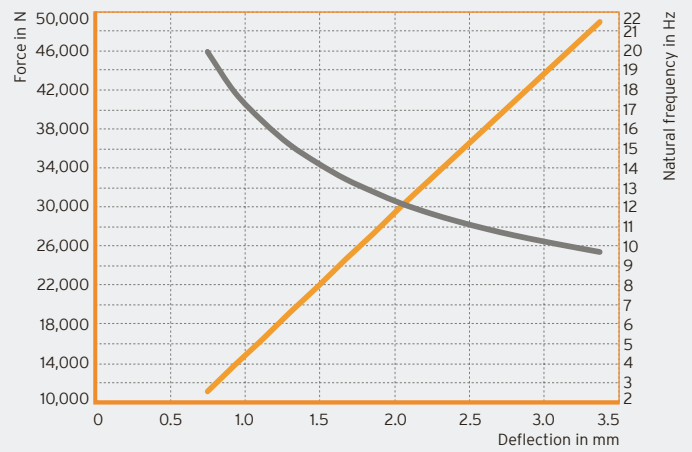

TR-10000

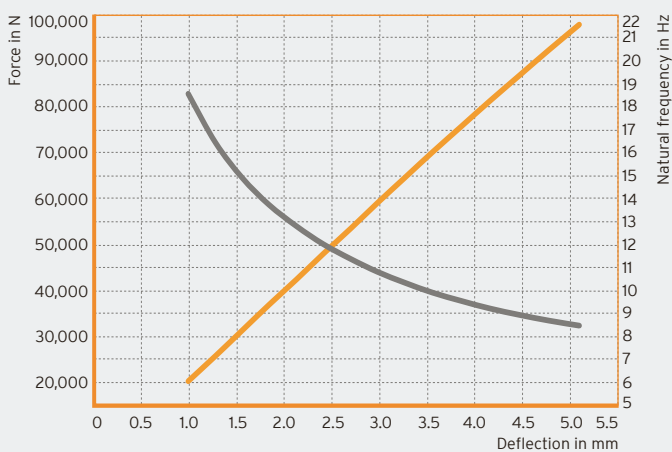

— Force in N
— Natural frequency in Hz

DB Isotop en © Copyright by Getzner Werkstoffe GmbH | 02-2022 | All information and data is based on our current knowledge. It can be used in calculations and for reference purposes, but is subject to product-specific and application-specific manufacturing tolerances and does not represent warranted properties. Material properties and their tolerances vary depending on the type of application and load and are available from Getzner on request. Subject to change without notice. For further general information, see VDI directive 2062 and glossary. Further characteristic values available on request.