

# g-sole PER D20

## Specifications

PER  
D20


g-sole  
by getzner

**Material** open-cell PU elastomer  
(polyurethane)  
**Colour** rosé

**PLATES:**  
**Standard delivery dimension**  
Thickness: 2 to 6 mm, 18 mm  
Sheets: 1370 x 1200 mm

**XL-REELS:**  
**Standard delivery dimension**  
Thickness: 2 to 6 mm, 18 mm  
Width: 1370 mm  
Length: depending on thickness

Other dimensions on request.

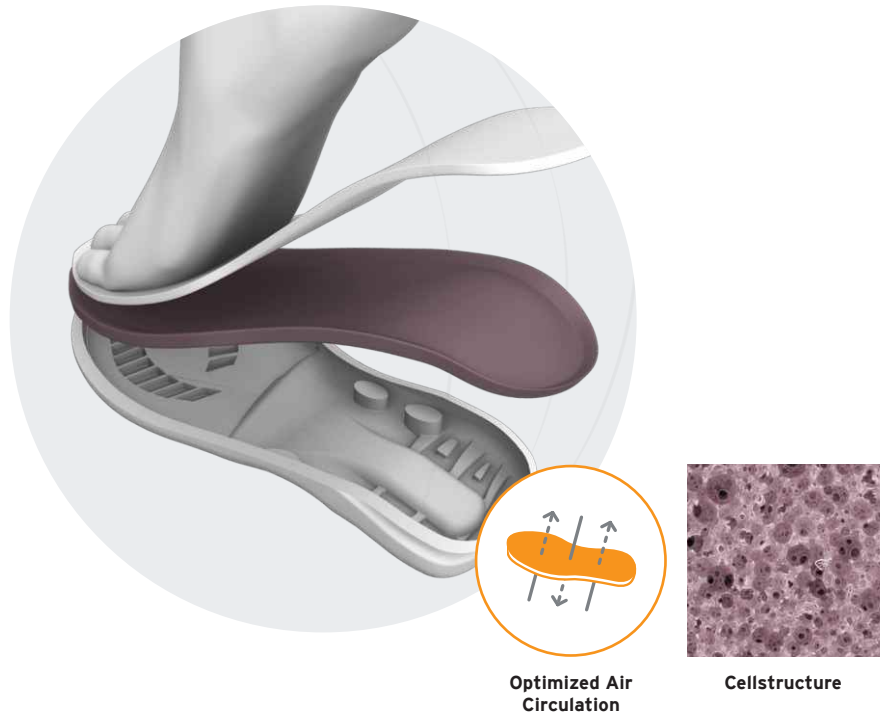

Material properties	Test methods <sup>1</sup>	Value	Comment
Density (Mean)	ASTM D3574 Test A	15 lb/ft <sup>3</sup> 245 kg/m <sup>3</sup>	
Compression set <sup>2</sup>	ASTM D3574 Test D	< 4 %	@ 50 % compression, 23°C (73.4°F), 72 h
Compression Force Deflection <sup>2</sup>	ASTM D3574 Test C	8 psi 55 kPa	@ 25 % compression
Min. tensile stress at rupture	ASTM D3574 Test E	59 psi 407 kPa	
Min. tensile elongation at rupture	ASTM D3574 Test E	164 %	
Min. tear strength	ASTM D624 Test C	11.4 lbf/in 2.0 kN/m	
Loss factor	DIN 53513	0.19	
Rebound elasticity	ISO 8307	55 %	
Water absorption	ASTM D1056	312 %	
Air permeability	Densometer		Open cell - breathable
Operating temperature		-30 to 70°C -22 to 158°F	Short time higher temperature possible
Chemical resistance			There is an extra data sheet Chemical Resistance available.

<sup>1</sup> Tests according to respective standards

<sup>2</sup> The measurement is performed on a density-dependent basis with differing test parameters

All information and data is based on our current knowledge. The data can be applied for calculations and as guidelines, are subject to typical manufacturing tolerances and are not guaranteed. Material properties as well as their tolerances can vary depending on type of application or use and are available from Getzner on request. Further information can be found in VDI Guideline 2062 (Association of German Engineers) as well as in glossary. Further characteristic values on request. We reserve the right to amend the data. DB g-sole PER D20 en © Copyright by Getzner Werkstoffe GmbH | 02-2023

